


Grizzly LED Panel

Backlit 5 CCT & Wattage Selectable



Surface Mount Kits



Emergency Driver



Specifications	1x4	2x4	2x2
Watts	15/20/25/30/40	30/40/50/60/72	15/20/25/30/40
Voltage	120-277v - 120-347v		
Kelvin (Selectable)	3500/4000/5000/5700/6500K		
Efficacy	130 LPW		
Lumens	1950/2600/3250/3900/5200	3900/5200/6500/7800/9360	1950/2600/3250/3900/5200
CRI	83		
Operating Temp	-20°C to 45°C		
Beam Angle	100°+		
Mounting	Recessed/Surface/Suspension		
Controls	Dimmable/Tunable		
Approx Lifespan	L70 @ 50 000 hrs		



Technical Specifications and Certifications Provided by the Manufacturer

Features


- 5 color and wattage selectable options
- DLC Premium approved
- Damp location/IC rated
- 120-347v dimmable driver
- Suspension or surface mount kit available

Description

Ideal for offices, commercial applications, garages, suspended ceilings and new construction projects, this dimmable LED panel offers versatile lighting options with 5 color and wattage options.


2x2 Models

23.74"L x 23.74"W x 1.38"H

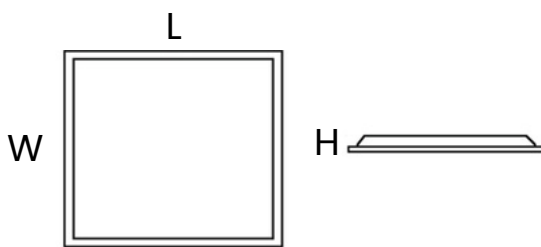

1x4 Models

47.76"L x 11.93"W x 1.38"H

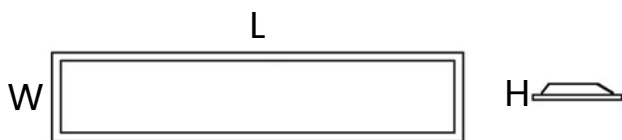

2x4 Models

47.76"L x 23.74"W x 1.38"H

