

Full Cutoff Wall Pack

Wattage and CCT Selectable Wall Pack



Description

Designed for no upwards light and maximum flexibility with tunable kelvin and wattage built-in. Achieve a high clarity with a tempered glass lens

Features

- IP65 water and dust resistant
- Built-In Photocell
- DLC Premium approved
- 6KV surge protected
- UV Coated Tempered Glass Lens
- Robust design

Specifications	70w	125w	135w
Watts (Selectable)	70/56/42/28W	125/100/75/50W	135/108/81/54W
Voltage	100-277 - 120-347 VAC		
Kelvin (Selectable)	3000/4000/5000K		
Efficacy	150 LPW		
Lumens	10500	18750	20250
CRI	70		
Operating Temp	-40°C to 55°C		
Beam Angle	140°		
Mounting	Wall Plate		
Controls	Built-In Photocell / Dimmable / Selectable		
Approx Lifespan	LM80 50,000 hrs		
Surge Protection	6KV		






Technical Specifications and Certifications Provided by the Manufacturer

Dimensions




unit: mm/inch

70W - 125W

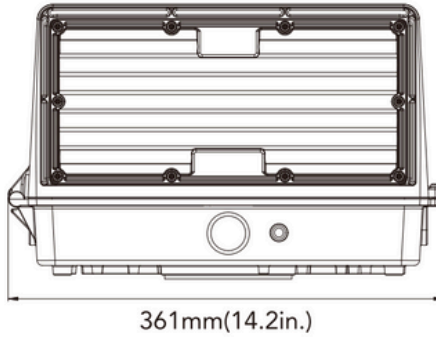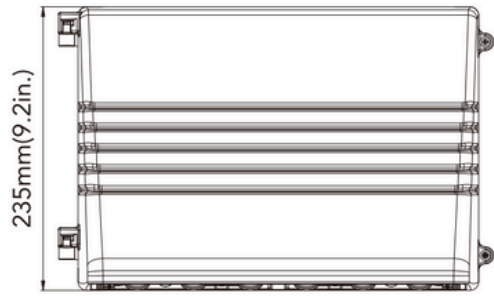

Net Weight
70W: 7.21lb
125W: 7.68lb


135W

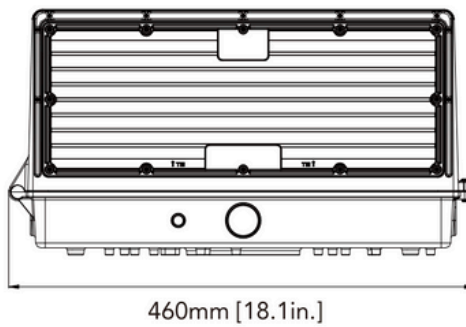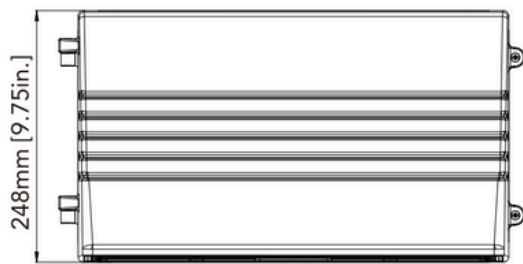

Net Weight
135W: 10.47lb



Colour and Wattage Selection



PERFORMANCE DATA

70W								
SWITCH SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	70W	70	9800lm	140lm/W	11000lm	157lm/W	10200lm	146lm/W
80%	56W	70	8200lm	146lm/W	9100lm	163lm/W	8700lm	155lm/W
60%	42W	70	6400lm	152lm/W	7000lm	167lm/W	6800lm	162lm/W
40%	28W	70	4400lm	157lm/W	4800lm	171lm/W	4700lm	168lm/W

125W								
SWITCH SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	125W	70	17100lm	137lm/W	19000lm	152lm/W	18000lm	144lm/W
80%	100W	70	14200lm	142lm/W	15700lm	157lm/W	15000lm	150lm/W
60%	75W	70	11000lm	147lm/W	12100lm	161lm/W	11700lm	156lm/W
40%	50W	70	7600lm	152lm/W	8200lm	164lm/W	8100lm	162lm/W

135W								
SWITCH SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	135W	70	18000lm	133lm/W	20000lm	148lm/W	19000lm	141lm/W
80%	108W	70	15000lm	139lm/W	16400lm	152lm/W	15600lm	144lm/W
60%	81W	70	11600lm	143lm/W	12600lm	156lm/W	12000lm	148lm/W
40%	54W	70	8000lm	148lm/W	8600lm	159lm/W	8200lm	152lm/W

ELECTRICAL DATA

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	1050	70	120	0.58
		70	208	0.34
		70	240	0.29
		70	277	0.25
		70	347	0.20
1	1100	125	120	1.04
		125	208	0.60
		125	240	0.52
		125	277	0.45
		125	347	0.36
1	1150	135	120	1.13
		135	208	0.65
		135	240	0.56
		135	277	0.49