


Center Basket/Troffer

CCT & Wattage Selectable LED Panel



Specifications	1x4	2x2 S	2x2	2x4	2x4 XL
Watts (Selectable)	20/25/30w	20/25/30w	25/30/35w	34/38/45w	46/52/56w
Voltage	120-347 VAC				
Kelvin (Selectable)	3500/4000/5000K				
Efficacy	125 LPW				
Max Lumens	3750	3750	4375	5625	7000
CRI	80+				
Operating Temp	-20°C to 50°C				
Beam Angle	110°				
Mounting	Grid Ceiling / Recessed / Surface Mount				
Controls	Dimmable/ Tunable/Motion Sensor	Dimmable/ Tunable	Dimmable/Tunable/Motion Sensor		Dimmable/ Tunable
Approx Lifespan	L70 100,000 hrs				

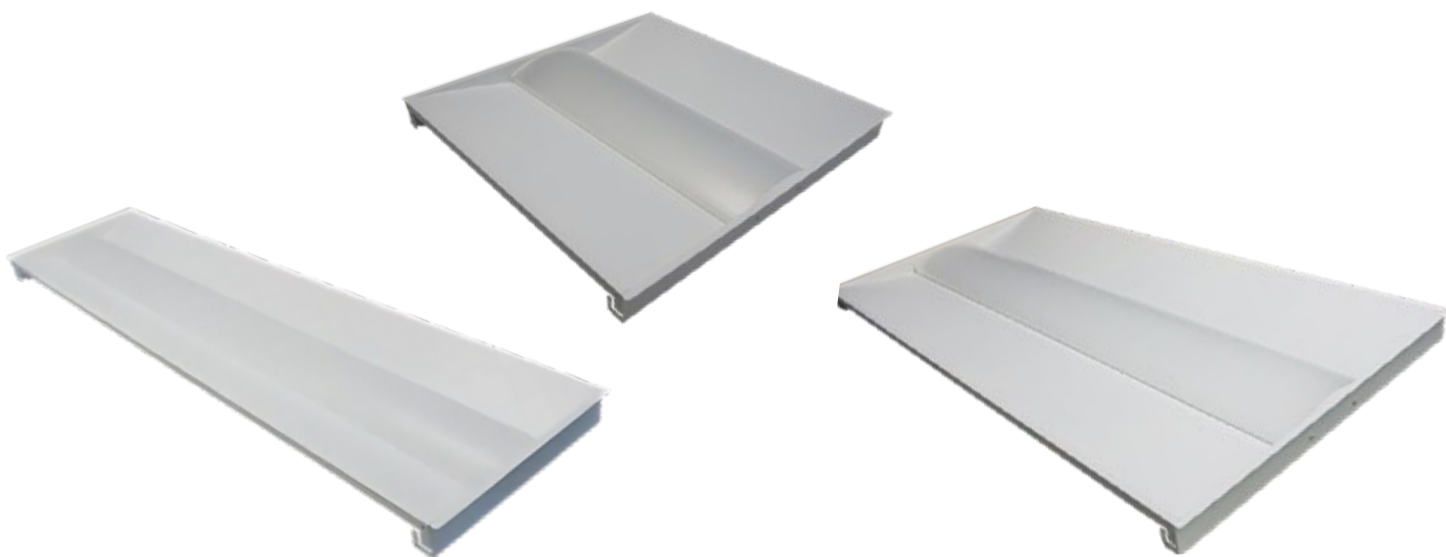


Technical Specifications and Certifications Provided by the Manufacturer

Description

Elevate any office with this reliable and simple drop in center basket solution. Save on power usage without needing expensive custom fixtures while still looking classy!

Features

- Color and wattage selectable
- Universal Voltage
- Dimmable
- DLC Premium approved
- Low Glare design
- Motion sensor available

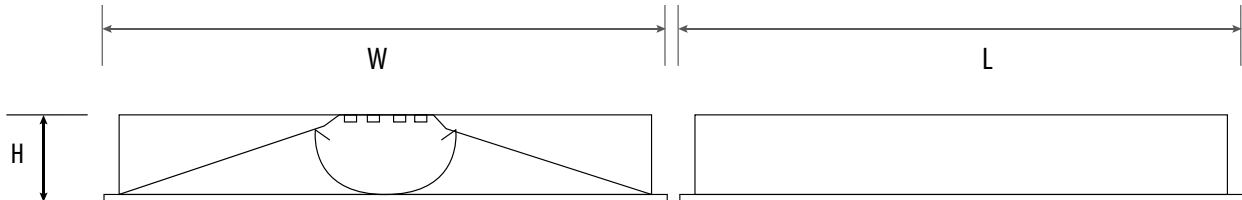

	W	L	H
1'x4'	11.75"	47.75"	2.24"
2'x2'	23.75"	23.75"	2.24"
2'x4'	23.75"	47.75"	2.24"

Low Voltage Sensor (LVS) Remote

