

Grizzly LED Panel

Backlit CCT & Wattage Selectable



Specifications	1x4	2x4	2x2	2x4
Watts	20/25/30/36/40	30/40/50/60/72	20/25/30/36/40	25/30/40/45/50
Voltage	120-277v - 120-347v			
Kelvin (Selectable)	3500/4000/5000/5700/6500K			
Efficacy	130 LPW			
Lumens (Max)	5200	9360	5200	6500
CRI	80 +			
Operating Temp	-20°C to 45°C			
Beam Angle	100°+			
Mounting	Recessed/Surface/Suspension			
Controls	Dimmable/Tunable			
Approx Lifespan	L70 @ 50 000 hrs			



Technical Specifications and Certifications Provided by the Manufacturer

Features

- 5 color and wattage selectable options
- DLC Premium approved
- Damp location/IC rated
- 120-347v dimmable driver
- Suspension or surface mount kit available

Description

Ideal for offices, commercial applications, garages, suspended ceilings and new construction projects, this dimmable LED panel offers versatile lighting options with 5 color and wattage options.

Surface Mount Kits




Emergency Driver




2x2 Models

23.74"L x 23.74"W x 1.38"H

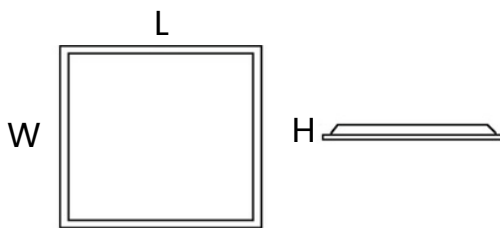

1x4 Models

47.76"L x 11.93"W x 1.38"H

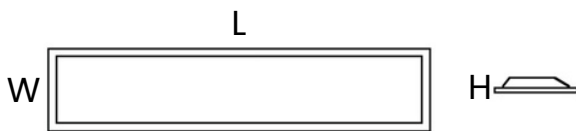

2x4 Models

47.76"L x 23.74"W x 1.38"H

