



## Description

Three wattages and three colors combined with a 120-347v driver make our TUNDRA shoebox light very flexible and perfect for many applications!


## Features

- IP65 water and dust resistance
- Wide operating temperature range
- Optional photocell for auto on/off
- IK08 rated
- Wattage and color selectable
- Aluminum housing and durable polycarbonate lens

Specifications	TND-PL-SB150-01	TND-PL-SB300-01
Watts	70/100/150W	200/240/300W
Voltage	120-347 VAC	
Kelvin	3000/4000/5000k	
Efficacy	Up To 150 LPW	
Max Lumens	10500/15000/22500	30000/36000/45000
CRI	80+	
Operating Temp	-40°C to 45°C	
Beam Distribution	Type III / Type IV / Type V	
Mounting	Slip Fitter, Square, Trunnion, Yoke	
Controls	Photocell, Motion Sensor	
Approx Lifespan	50,000 hrs	
Surge Protection	6KV	
Power Factor	0.95	



Technical Specifications and Certifications Provided by the Manufacturer

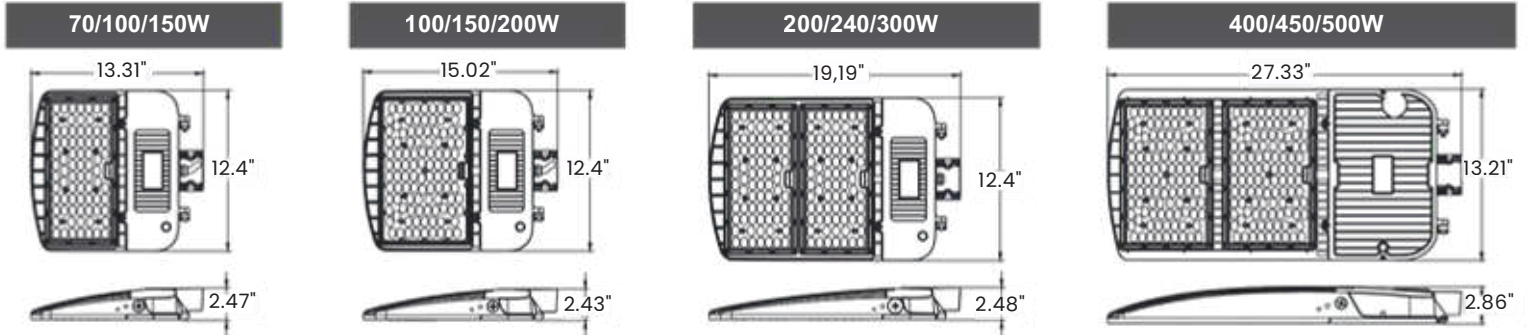

	Packing	Size	Net Weight	Gross Weight	pcs/ctn
150/100/70W	Outer Packing Size	L14.17 * W13.19 * H4.53 inch L360 * W335 * H115 mm	7.14Lbs(3.24Kg)	8.80Lbs(3.99Kg)	1pcs/ctn
200/150/100W	Outer Packing Size	L15.79 * W13.19 * H4.53 inch L401 * W335 * H115 mm	7.94Lbs(3.60Kg)	9.59Lbs(4.35Kg)	1pcs/ctn
300/240/200W	Outer Packing Size	L20.08 * W13.19 * H4.53 inch L510 * W335 * H115 mm	10.16Lbs(4.61Kg)	11.82Lbs(5.36Kg)	1pcs/ctn
500/450/400W	Outer Packing Size	L28.27 * W14.13 * H4.53 inch L718 * W359 * H115 mm	18.72Lbs(8.49Kg)	20.59Lbs(9.34Kg)	1pcs/ctn

## MOUNTING OPTIONS



Adjustable arm mount  
(Square/Round pole)



Slip-fitter



Trunnion



Yoke



Glare shield




Microwave  
motion sensor




Photocell sensor


## 150W

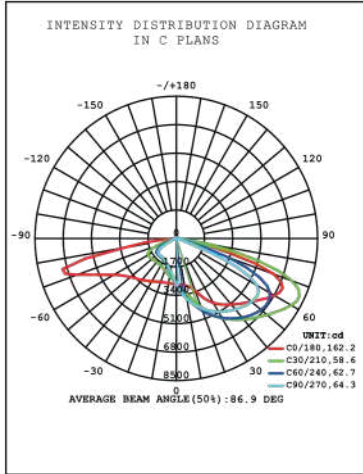



## 200W

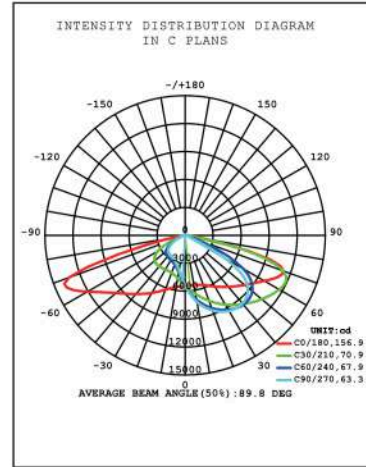


## 300W

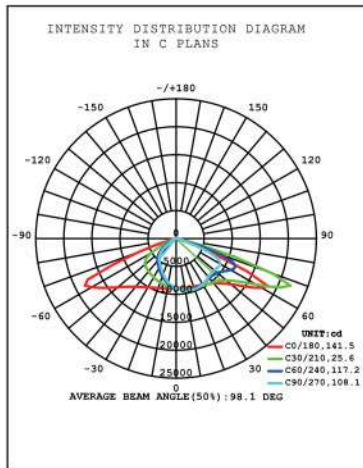


## 500W

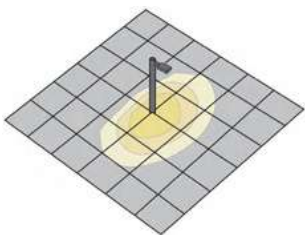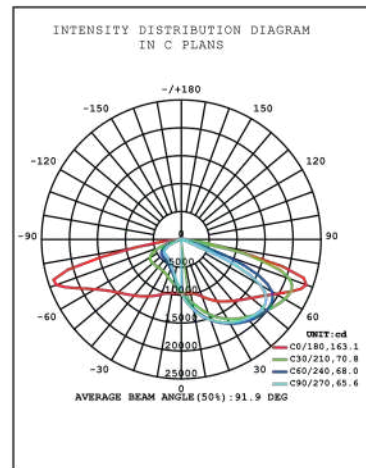


Type II Optics

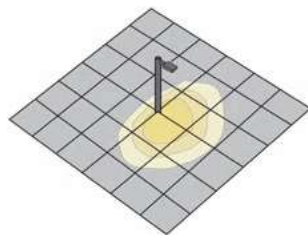

Type III optics

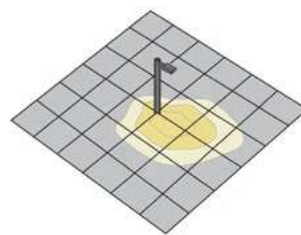

Type IV optics

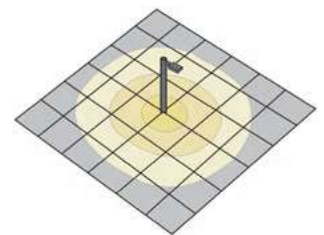

Type V optics