



Description

The all-new Grizzly ORBIX UFO High Bay puts exceptional efficiency into a compact fixture, with our industry leading warranty and service to back it up!

Features

- IP65 water and dust resistance
- Wide operating temperature range
- Optional Motion Sensor / Remote
- Wattage and color selectable
- DLC 5.1 Premium Rated

Specifications	OBX-HB-RD150-01	OBX-HB-RD240-01
Watts	100/120/150W	180/200/240W
Voltage	120-347 VAC	
Kelvin	3500/4000/5000k	
Efficacy	150 LPW	
Max Lumens	15000/18000/22500	27000/30000/36000
CRI	80+	
Operating Temp	-40°C to 45°C	
Beam Distribution	90° Deg Beam Spread	
Mounting	Safety Hook	
Controls	Microwave Motion Sensor / Tunable / 0-10V Dimming	
Approx Lifespan	50,000 hrs	
Surge Protection	6KV	
Power Factor	>0.9	



Technical Specifications and Certifications Provided by the Manufacturer




Screw-in Microwave Motion Sensor


WATT/CCT
SELECTABLE



100/120/150W

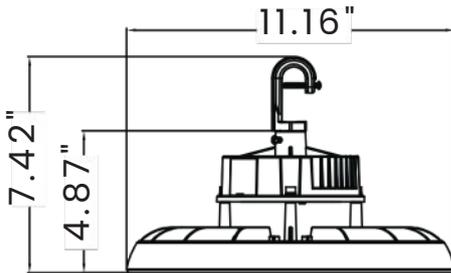

180/200/240W

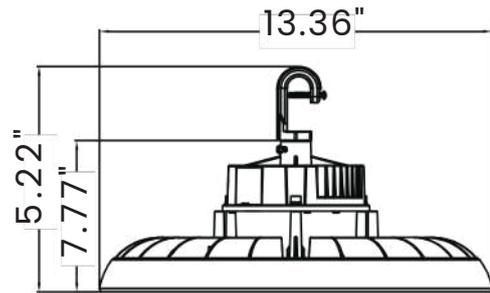

Packing

Size

Net Weight

Gross Weight

pcs/ctn

	Packing	Size	Net Weight	Gross Weight	pcs/ctn
70/100/150W	Outer Packing Size	L13.31 * W13.31 * H6.3 inch L338 * W338 * H160 mm	4.19Lbs(1.9Kg)	5.95Lbs(2.7Kg)	1 pcs/ctn
180/200/240W	Outer Packing Size	L15.63 * W15.63 * H6.69 inch L397 * W397 * H170 mm	5.51Lbs(2.5Kg)	7.72Lbs(3.5Kg)	1 pcs/ctn

Accessories



Safety Rope
(Included)



Microwave
Motion Sensor




Haisen
Remote




Safety
Hook

240W - 5000K

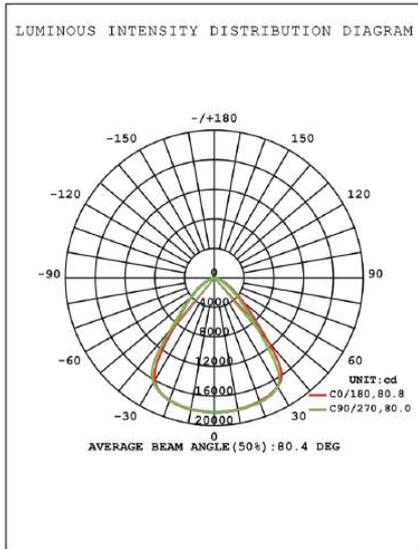

150W - 5000K

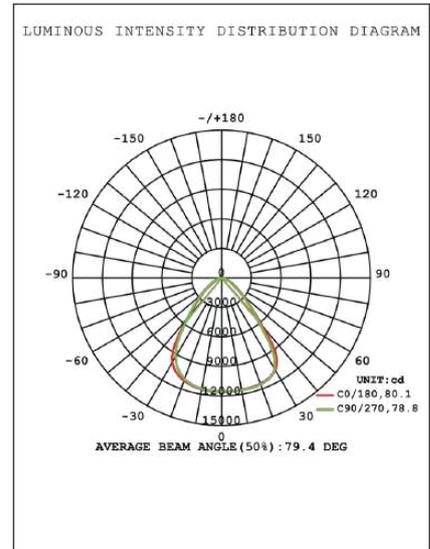


Flux out: 23387 lm

Height	Eavg, Emax	Angle: 79.79deg	Diameter
3.048m	1138, 1993lx		509.57cm
3.658m	790.3, 1384lx		611.49cm
4.877m	444.6, 778.4lx		815.32cm
6.096m	284.5, 498.1lx		1019.15cm
9.144m	126.5, 221.4lx		1528.72cm
10.67m	92.90, 162.7lx		1783.51cm
12.19m	71.13, 124.5lx		2038.29cm
13.72m	56.20, 98.40lx		2293.08cm
15.24m	45.52, 79.70lx		2547.87cm
16.76m	37.62, 65.87lx		2802.65cm


Flux out: 14045 lm

Height	Eavg, Emax	Angle: 77.94deg	Diameter
1m	6817, 11812lx		161.77cm
2m	1704, 2953lx		323.55cm
3m	757.5, 1312lx		485.32cm
4m	426.1, 738.3lx		647.09cm
5m	272.7, 472.5lx		808.87cm
6m	189.4, 328.1lx		970.64cm
7m	139.1, 241.1lx		1132.41cm
8m	106.5, 184.6lx		1294.19cm
9m	84.17, 145.8lx		1455.96cm
10m	68.17, 118.1lx		1617.73cm

1.Hook installation:

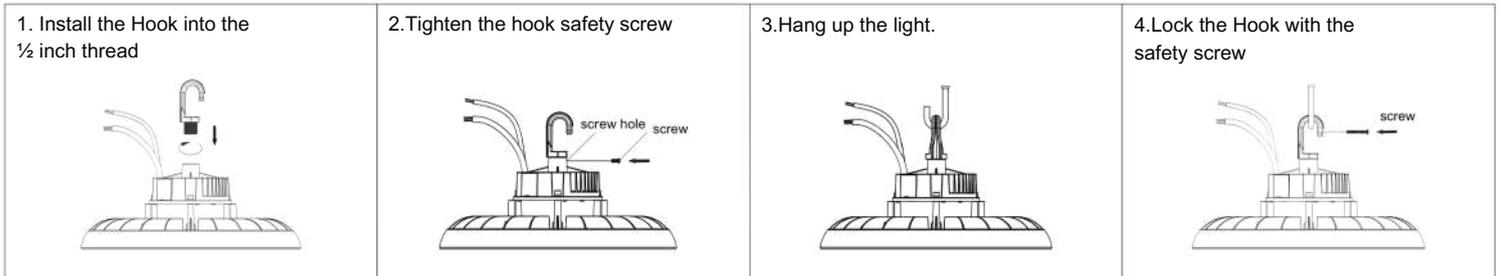

4.Sensor installation:

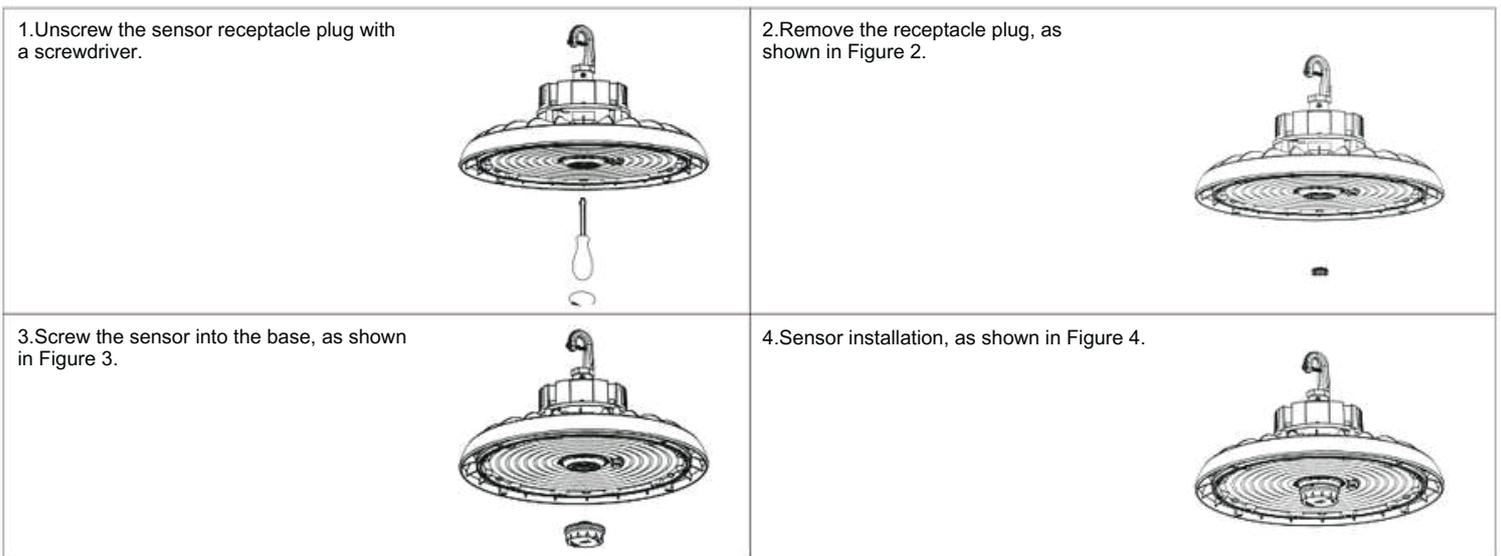

Wiring Connection:

Turn off the power, connect AC power. Black wire to Live, white wire to Neutral, and green wire to Ground.

Dimmer connection 1. Compatible with 0-10V dimming. 2. Connect wires as below, purple wire is Dim+, pink wire is Dim-, cap red wire.

