

GRIZZLY LIGHTING

Product Guide

Summer 2026



Free Shipping



Easy Returns



Real Warranty!
Covers Your Labour



Fast Quotes
Quick Shipping



NEW!

**Updated Retrofit Project ROI Calculator
& Contractor Pole Quote Configurator**

Pages 28 & 29

CANADIAN
OWNED & OPERATED



Free Shipping



Easy Returns




Real Warranties

Thrill your toughest customers with Grizzly's help! We help Canadian electricians with design/build/retrofit lighting and hookup projects.

Lights, poles, hardware and supplies, with no minimums direct-to-contractor only.

We're a small, nimble team with roots in hospital lighting in the early 2000s. Since 2022 we've focused exclusively on commercial and industrial sales to Electricians only. Our focus is on your success, with free shipping, easy returns and a warranty that covers labour.

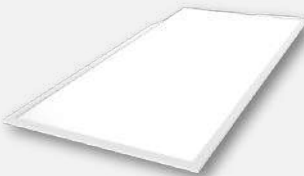

	PAGE 4 HIGH BAYS		PAGE 7 POLE TOP/ SHOEBOX		PAGE 9 DOCKS		PAGE 10 SHOP/ LINEAR
	PAGE 13 WALL		PAGE 19 CEILING/ INDOORS		PAGE 23 POST TOP		PAGE 24 CORN BULBS
	PAGE 25 TEMPORARY		PAGE 26 CANOPY				PAGE 27 ELECTRICAL DEVICES & ACCESSORIES

				
5-Year Warranty with Labour included!	Colour Selectable	Wattage Selectable	Ingress Protection	Quick Ship in Stock!



ORBIX UFO HIGH BAY

Lower your costs with this integrated driver UFO High Bay. The built-in LED driver means a lower shipping cost, and a simpler 9-in-1 solution without compromising on quality!





Model	Watts (Selectable)	Color (Kelvin) (Selectable)	CRI	Efficacy (lm/W)	Lumen Output (LM)	Voltage
OBX-HB-RD150-01	100/120/150W	3500/4000/5000K	80+	150	15000/18000/22500	AC 120-347V
OBX-HB-RD240-01	180/200/240W	3500/4000/5000K	80+	150	27000/30000/36000	AC 120-347V
OBX-HB-RD300-01	200/240/300W	3500/4000/5000K	80+	150	30000/36000/45000	AC 120-347V





ARTIX Adjustable Linear High Bay

This adjustable linear high bay lets you aim light exactly where it's needed, with selectable wattage and color built in. Ideal for production lines, aisles and assembly areas.

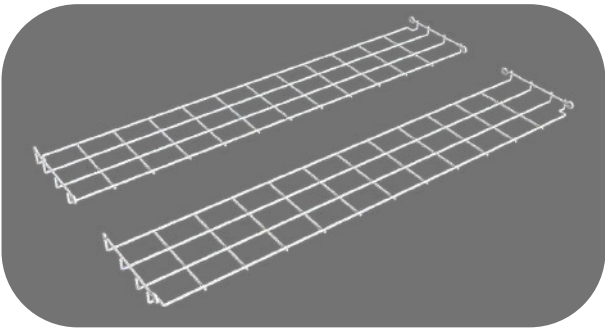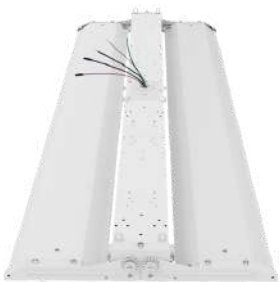

Model	Watts (Selectable)	Color (Kelvin) (Selectable)	CRI	Efficacy (lm/W)	Lumen Output (LM)	Voltage
ATX-HB-LN165-01	80/110/165W	3500/4000/5000K	80+	140	11200/15400/23100	AC 120-347V
ATX-HB-LN300-01	165/225/300W	3500/4000/5000K	80+	140	23100/31500/42000	AC 120-347V





SENSOR SELECT UFO HIGH BAY – NEMA 4X

The power of wattage and color selectable options built in, plus a wide array of sensors and accessories to configure a light perfect for your application!

Watts (Selectable)	Color (Kelvin) (Selectable)	CRI	Efficacy (Lm/W)	Lumen Output (LM)	Voltage
90/120/150W	4000/5000K	80+	150	13800/18400/23000	AC 120-347V
180/200/240w	4000/5000K	80+	150	23700/30800/37000	AC 120-347V
240/270/300W – NSF Only	4000/5000K	80+	170	40800/45900/51000	AC 120-347V



DOME UFO HIGH BAY

A simple and effective high bay lighting solution, water and dust proof. Its 120° frosted lens reduces glare while giving an even light dispersion.

Watts (Selectable)	Color (Kelvin) (Selectable)	CRI	Efficacy (Lm/W)	Lumen Output (LM)	Voltage
80/100/150W	4000/5000K	80+	150	12000/15000/22500	AC 120-347V
100/150/200W	5000K	80+	150	15000/22500/30000	AC 120-347V








TUNDRA SHOEBOX AREA LIGHT



Use this high efficiency shoebox area light in a variety of applications including parking lots, roadways, buildings and much more.

Model	Watts (Selectable)	Color (Kelvin) (Selectable)	CRI	Efficacy (Lm/W)	Lumen Output (LM)	Voltage
TND-PL-SB150-01	70/100/150W	3000/4000/5000K	80+	150	10500/15000/22500	AC 120-347V
TND-PL-SB300-01	200/240/300W	3000/4000/5000K	80+	150	30000/36000/45000	AC 120-347V
TND-PL-SB500-01	400/450/500W	5000K	80+	150	60000/67500/75000	AC 120-347V

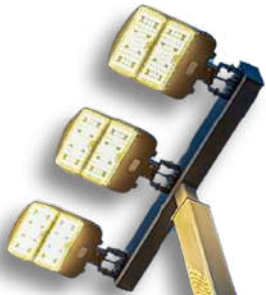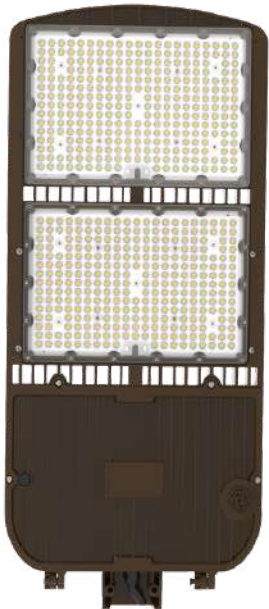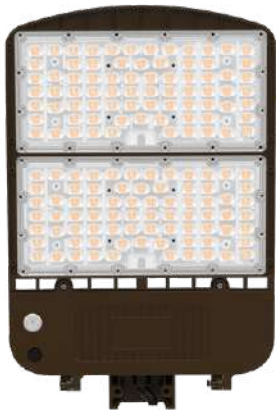



AREAV3
SHOEBOX
AREA LIGHT

BLACK
WHITE

Three wattages and three colors combined with a 120-347v driver make this shoebox light very flexible for many applications!

Watts (Selectable)	Color (Kelvin) (Selectable)	CRI	Efficacy (Lm/W)	Lumen Output (LM)	Voltage
70/100/150W	3000/4000/5000K	80+	150	10500/15000/22500	AC 120-347V
200/240/300W	3000/4000/5000K	80+	150	30000/36000/45000	AC 120-347V
400/450/500W	5000K	80+	150	60000/67500/75000	AC 100-277V



FLOOD LIGHT –
YOKE MOUNT

A cost effective solution to replace old HID and MH flood lights, with a robust, efficient design and a wide beam angle to light up everything!

Watts	Color (Kelvin)	CRI	Efficacy (Lm/W)	Lumen Output (LM)	Voltage
100W	5700K	70+	145	14500	AC 120-347V
150W	5700K	70+	145	21750	AC 120-347V
200W	5700K	70+	145	29000	AC 120-347V






50 WATT LED DOCK LIGHT

Market leading 7000 lumens! Durable & robust with soft-start for longevity and CREE LEDs. Plug & Play with super easy installation and works from -35°C to 60°C.




Standard US Plug Available

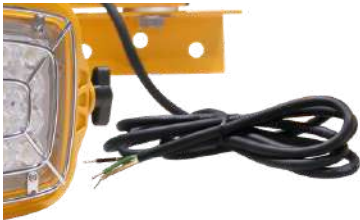

5ft Cord length



Watts	Color (Kelvin)	CRI	Efficacy (Lm/W)	Lumen Output (LM)	Voltage
20W	5000K	70+	140	2800	AC 100-277V
30W	5000K	70+	140	4200	AC 100-277V
40W	5000K	70+	140	5600	AC 100-277V
50W	5000K	70+	140	7000	AC 100-277V

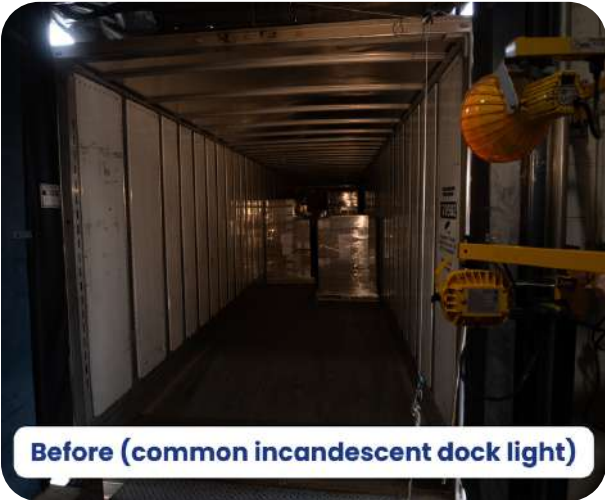



NORTHLINE LINEAR STRIP LIGHT

A high efficiency linear strip light available in 2 ft, 4 ft and 8 ft lengths, with selectable wattage and color for a wide range of commercial applications.



2ft

4ft

8ft

Model	Watts (Selectable)	Color (Kelvin) (Selectable)	CRI	Efficacy (Lm/W)	Lumen Output (LM)	Voltage
NTH-CL-LN25-01	15/20/25W	3500/4000/5000K	80+	130	1950/2600/3250	AC 120-347V
NTH-CL-LN46-01	30/38/46W	3500/4000/5000K	80+	130	3900/4940/5980	AC 120-347V
NTH-CL-LN90-01	55/65/75/90W	3500/4000/5000K	80+	130	7150/8450/9750/11700	AC 120-347V



4ft



GLACIER VAPOUR TIGHT LIGHT

The ideal fixture for any building where humidity or water is present, or where a rugged light is required for tough environments.

8ft



Model	Watts (Selectable)	Color (Kelvin) (Selectable)	CRI	Efficacy (Lm/W)	Lumen Output (LM)	Voltage
GLC-CL-VP60-01	30/45/60W	3500/4000/5000K	80+	150	4500/6750/9000	AC 120-347V
GLC-CL-VP100-01	60/80/100W	3500/4000/5000K	80+	150	9000/12000/15000	AC 120-347V





APLINE COMPACT WALL PACK

Perfect for any wall, this wall pack light will provide a clear bright wall wash, with tunable CCT options to find the perfect color. The built in photocell makes it even easier to use!




Model	Watts (Selectable)	Color (Kelvin) (Selectable)	CRI	Efficacy (lm/w)	Lumen Output (LM)	Voltage
ALP-WL-WP60-01	30/40/60W	3000/4000/5000K	80+	140	4200/5600/8400	AC 120-347V
ALP-WL-WP120-01	80/100/120W	3000/4000/5000K	80+	140	11200/14000/16800	AC 120-347V





**APLINE
ADJUSTABLE
FULL CUTOFF**

This adjustable full cutoff wall pack directs light down and out to reduce light pollution, with selectable wattage and color and a built-in photocell for easy use.

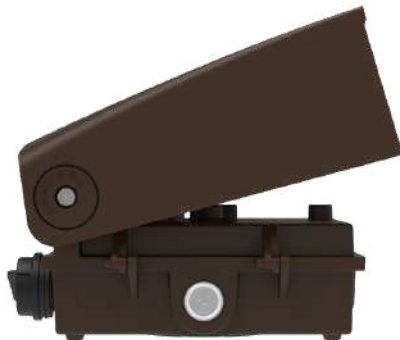

Model	Watts (Selectable)	Color (Kelvin) (Selectable)	CRI	Efficacy (Lm/W)	Lumen Output (LM)	Voltage
ALP-WL-WP80-02	40/60/80W	3000/4000/5000K	80+	130	5200/7800/10400	AC 120-347V
ALP-WL-WP120-02	80/100/120W	3000/4000/5000K	80+	130	10400/13000/15600	AC 120-347V





APLINE 30W MINI WALL PACK

A compact wall pack for entryways, walkways and tight exterior spots, with selectable wattage and color and a built-in photocell for hands-off operation.



Model	Watts (Selectable)	Color (Kelvin) (Selectable)	CRI	Efficacy (lm/W)	Lumen Output (LM)	Voltage
ALP-WL-WP30-01	18/25/30W	3000/4000/5000K	80+	120	2160/3000/3600	AC 120-347V





OUTPOST LED BARN LIGHT

A dusk-to-dawn barn light for exterior walls and areas, with selectable wattage and color and a built-in photocell that runs it automatically.



Model	Watts (Selectable)	Color (Kelvin) (Selectable)	CRI	Efficacy (Lm/W)	Lumen Output (LM)	Voltage
OUT-WL-BN100-01	60/80/100W	3500/4000/5000	80+	120	7200/9600/12000	AC 120-347V





SLIM LED WALL PACK – 120–347V

Perfect for any wall, this wall pack light will provide a clear bright wall wash, with tunable CCT options to find the perfect color. The built in photocell makes it even easier to use!

Watts (Selectable)	Color (Kelvin) (Selectable)	CRI	Efficacy (Lm/W)	Lumen Output (LM)	Voltage
30/40/60W	3000/4000/5000K	80+	130	3900/5200/7800	AC 120-347V
80/100/120W	3000/4000/5000K	80+	130	10400/13000/15600	AC 120-347V



FULL CUTOFF WALL PACK

Designed for no upwards light and maximum flexibility with tunable kelvin and wattage built-in. Achieve a high clarity with a UV coated tempered glass lens.

Watts (Selectable)	Color (Kelvin) (Selectable)	CRI	Efficacy (Lm/W)	Lumen Output (LM)	Voltage
25/40/60W	3000/4000/5000K	80+	134	3350/5360/8040	AC 120-347V
80/100/120W	3000/4000/5000K	80+	134	10720/13400/16080	AC 120-347V





FULL CUTOFF ADJUSTABLE WALL PACK BLACK

The adjustable full cutoff wall pack gives the light needed while cutting unwanted light pollution. Available with selectable wattage and color and adjustable beam angle for better control.

Watts (Selectable)	Color (Kelvin) (Selectable)	CRI	Efficacy (Lm/W)	Lumen Output (LM)	Voltage
15/20/24/30W	3000/4000/5000K	70+	130	2175/2900/3480/4350	AC 120-347V
40/50/60/75W	3000/4000/5000K	70+	130	5800/7250/8700/10875	AC 120-347V





RAVEN BACKLIT PANEL LED – SELECTABLE

Ideal for offices, commercial applications, garages, suspended ceilings and new construction projects, this dimmable multi watt 2X4 CCT LED panel operates at 120-347V and offers versatile lighting options.

Model	Watts (Selectable)	Color (Kelvin) (Selectable)	Size	Efficacy (lm/w)	Lumen Output (LM)	Voltage
RVN-CL-PN72-01	30/40/50/60/72W	35/40/50/57/65K	2x4	130	3900/5200/6500/7800/9360	AC 120-347
RVN-CL-PN40-02	15/20/25/30/40W	35/40/50/57/65K	1x4	130	1950/2600/3250/3900/5200	AC 120-347
RVN-CL-PN40-01	15/20/25/30/40W	35/40/50/57/65K	2x2	130	1950/2600/3250/3900/5200	AC 120-347



Surface Mount Kits



Hanging Kits



Emergency Driver





LODGE LED SLIM PANEL POT LIGHTS

Elevate any office with this reliable and simple drop in center basket solution. Save on power usage without needing expensive custom fixtures while still looking classy!

2700K
Warm White

3000K
Soft White

3500K
Natural White

4000K
Cool White

5000K
Daylight

5 COLOR TEMPERATURE SELECTABLE

Adjust the suitable color temprature for its location easily


Model	Watts	Color (Kelvin) (Selectable)	Size	Efficacy (lm/w)	Lumen Output (LM)	Voltage
LDG-CL-PL9-01	9W	2700/3000/3500/4000/5000K	4 Inch	90	810	AC 120V
LDG-CL-PL12-01	12W	2700/3000/3500/4000/5000K	6 Inch	100	1300	AC 120V





CENTER BASKET TROFFER LIGHT PANEL

Elevate any office with this reliable and simple drop in center basket solution. Save on power usage without needing expensive custom fixtures while still looking classy!

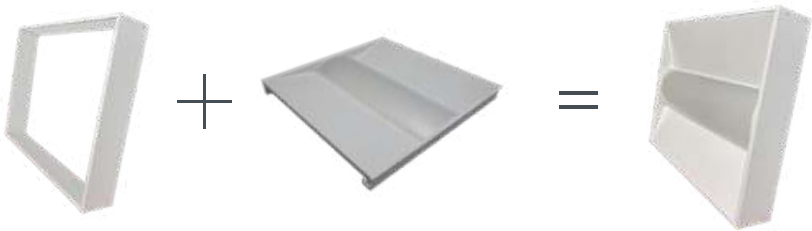

Surface Mount Kits

Low Voltage Sensor (LVS)
Remote



Watts (Selectable)	Color (Kelvin) (Selectable)	Size	Efficacy (Lm/W)	Lumen Output (LM)	Voltage
20/25/30W	3500/4000/5000K	1x4	125	2500/3125/3750	AC 120-347V
20/25/30W	3500/4000/5000K	2x2 S	125	2500/3125/3750	AC 120-347V
25/30/35W	3500/4000/5000K	2x2	125	3125/3750/4375	AC 120-347V
34/38/45W	3500/4000/5000K	2x4	125	4250/4750/5625	AC 120-347V
46/52/56W	3500/4000/5000K	2x4 XL	125	5750/6500/7000	AC 120-347V





COMMERCIAL DOWN LIGHT

Light up bigger commercial spaces, with less hassle and cost. A 15-in-1 small package that provides a high-quality diffused light is what you need!

Watts (Selectable)	Color (Kelvin) (Selectable)	CRI	Size	Efficacy (Lm/W)	Lumen Output (LM)	Voltage
9/13/18W	2700/3000/3500/ 4000/5000K	80+	4 Inch	110	990/1430/1980	AC 120-277V
13/19/27W	2700/3000/3500/ 4000/5000K	80+	6 Inch	110	1430/2090/2970	AC 120-277V
18/27/36W	2700/3000/3500/ 4000/5000K	80+	8 Inch	110	1980/2970/3960	AC 120-277V
20/30/40W	2700/3000/3500/ 4000/5000K	80+	10 Inch	110	2200/3300/4400	AC 120-277V

EMERGENCY LIGHTS – STANDARD & COMBO

High-Quality battery backup, head combos, and battery pack options, in stock and ready to go!





POST TOP - SELECTABLE

A post-top area light with selectable color for parking lots, pathways and other pole-mounted applications.

Watts (Selectable)	Color (Kelvin) (Selectable)	CRI	Efficacy (Lm/W)	Lumen Output (LM)	Voltage
36/48/60W	3000/4000/5000K	70+	140	5040/6720/8400	AC 100-277V
48/60/80W	3000/4000/5000K	70+	140	6720/8400/11200	AC 100-277V
60/80/100W	3000/4000/5000K	70+	140	8400/11200/14000	AC 100-277V
90/120/150W	3000/4000/5000K	70+	140	12600/16800/21000	AC 100-277V



UFO POST TOP - SELECTABLE

This slim wall pack light looks modern and refined with the same high performance. The tunable CCT options and built in photocell keeps it user-friendly and easy to use!

Watts	Color (Kelvin) (Selectable)	CRI	Efficacy (Lm/W)	Lumen Output (LM)	Voltage
60W	3000/4000/5000K	80+	130	7800	AC 100-277V
80W	3000/4000/5000K	80+	130	10400	AC 100-277V
100W	3000/4000/5000K	80+	130	13000	AC 100-277V
120W	3000/4000/5000K	80+	130	15600	AC 100-277V
150W	3000/4000/5000K	80+	130	19500	AC 100-277V
200W	3000/4000/5000K	80+	130	26000	AC 100-277V





SELECTABLE
CORN BULB

Reduce your inventory, cost, and time. Thrill your toughest customers with this innovative and super simple and easy color and wattage selectable corn bulb. Easily applied to many applications and DLC listed.

Watts (Selectable)	Color (Kelvin) (Selectable)	CRI	Efficacy (Lm/W)	Lumen Output (LM)	Voltage
9/12/18W	3000/4000/5000K	80+	140	1260/1680/2520	AC 100-277V
12/18/27W	3000/4000/5000K	80+	140	1680/2520/2940	AC 100-277V
18/27/36W	3000/4000/5000K	80+	140	2520/2950/5040	AC 100-277V
27/36/45W	3000/4000/5000K	80+	140	2950/5040/6300	AC 100-277V 



347V READY
SELECTABLE
CORN BULB

Reduce your inventory, cost, and time. Thrill your toughest customers with this innovative and super simple and easy color and wattage selectable corn bulb. Easily applied to many applications and DLC listed.

Watts	Color (Kelvin)	CRI	Efficacy (Lm/W)	Lumen Output (LM)	Voltage
54W	3000/4000/5000K	80+	140	7560	AC 277-480K
80W	3000/4000/5000K	80+	140	11200	AC 277-480K
100W	3000/4000/5000K	80+	140	14000	AC 277-480K 





SQUARE TEMP LIGHT - LINKABLE

This linkable temporary light is a easy safety no brainer! With 140 LPW LEDs you can light any work environment, and keep working even in the middle of winter.

Watts (Selectable)	Color (Kelvin) (Selectable)	CRI	Efficacy (Lm/W)	Lumen Output (LM)	Voltage
60W	3000K - 6000K	80+	140	8400	AC 100-277V
80W	3000K - 6000K	80+	140	11200	AC 100-277V
100W	3000K - 6000K	80+	140	14000	AC 100-277V
125W	3000K - 6000K	80+	140	17500	AC 100-277V
150W	3000K - 6000K	80+	140	21000	AC 100-277V




ROUND TEMP LIGHT - LINKABLE

Make any work environment safer and easier to work in any dark areas and at night! Super bright 120 LPW LEDs cast light in every direction, and keep working even in the middle of winter down to -40°C.


Watts	Color (Kelvin)	CRI	Efficacy (Lm/W)	Lumen Output (LM)	Voltage
60W	3000K - 6000K	80+	120	7200	AC 100-277V
100W	3000K - 6000K	80+	120	12000	AC 100-277V
150W	3000K - 6000K	80+	120	18000	AC 100-277V



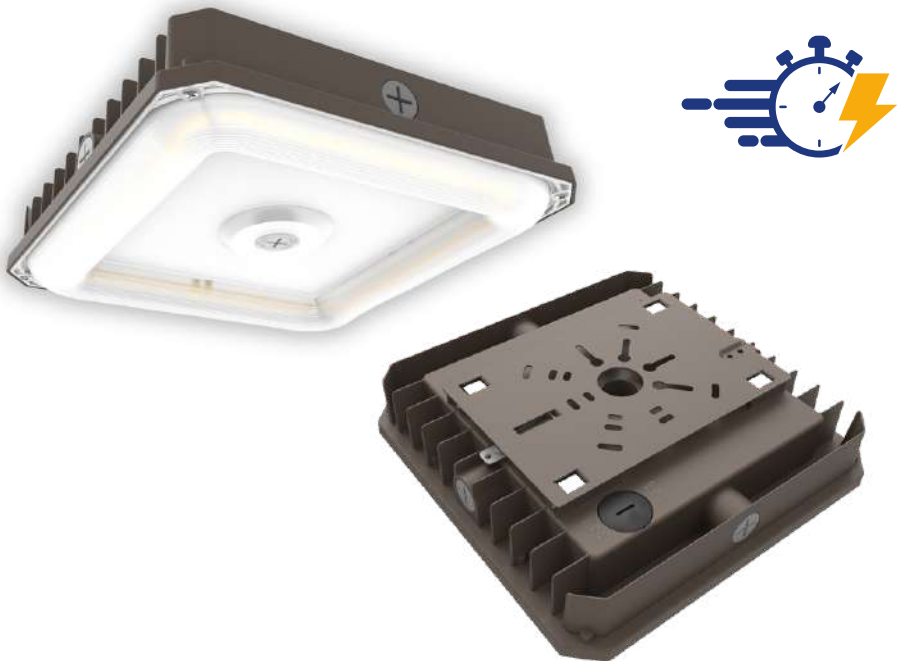

BOREAL CANOPY LIGHT SELECTABLE

With the equivalent of 9 lights in one, this is a very versatile exterior canopy light for gas stations, carports and covered areas. Built-in photocell for easy use, and a durable build.

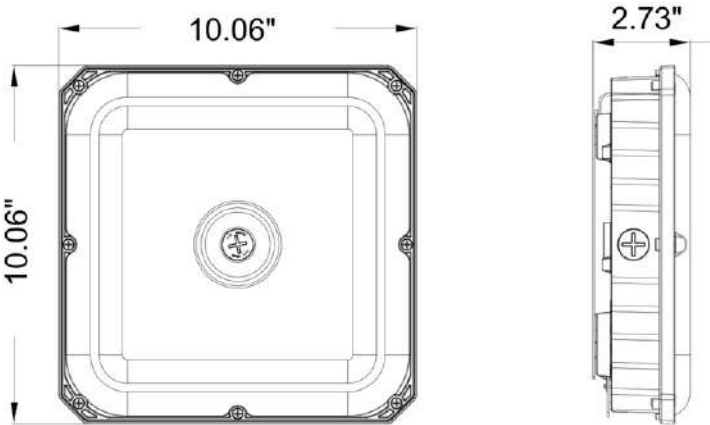

Model	Watts (Selectable)	Color (Kelvin) (Selectable)	CRI	Efficacy (Lm/W)	Lumen Output (LM)	Voltage
BRL-EX-CP100-01	60/80/100W	3500/4000/5000K	80+	135	8100/10800/13500	AC 120-347V






BOREAL CANOPY LIGHT 150W

A higher-output 150W canopy light for larger or taller canopies, with selectable color and a built-in photocell. Durable and simple to use.

Model	Watts	Color (Kelvin) (Selectable)	CRI	Efficacy (lm/w)	Lumen Output (LM)	Voltage
BRL-EX-CP150-01	150W	3000/4000/5000K	80+	130	19500	AC 120-347V

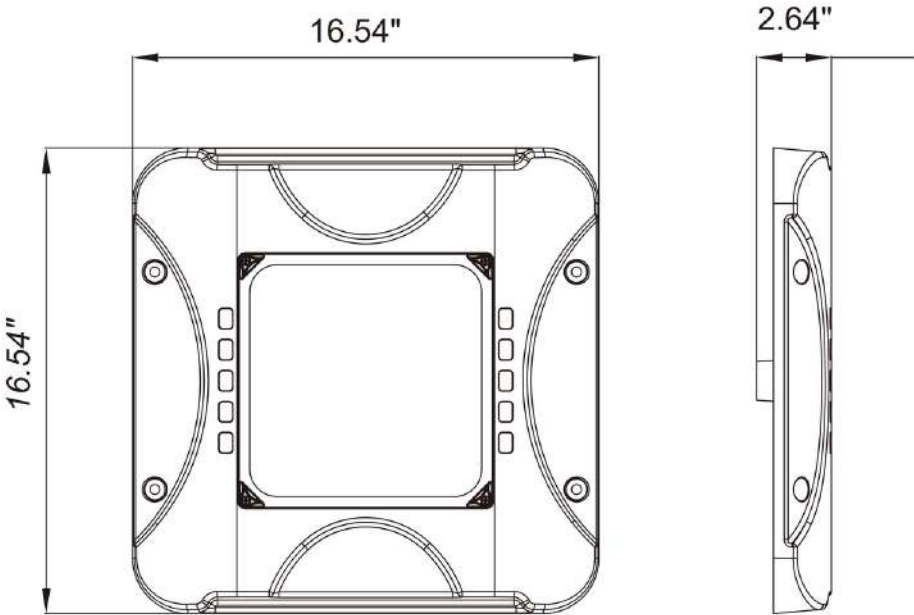



NIAGARA OUTLETS

BEACON SWITCHES

In stock, high quality Tamper Resistant and Weather Resistant Decorator style outlets, and Decorator style Switches for residential and commercial grade projects!

Backed by our industry leading 5-year warranty with labour included!



Model	Type	Current	# of Poles	Withstand Voltage	Grade	Material	Voltage
BCN-WL-DEC120-15-SPST	One way Decorator Switch	15A	1 Pole - 3 Wires	2000V	Residential & Commercial	High-Impact Polycarbonate	AC 120-277V
NGA-WL-DEC125-15-TRWR	Decorator Receptacle	15A	2 Pole - 3 Wires	2000V		High-Impact Polycarbonate	AC 125V
NGA-WL-DEC125-20-TRWR	Decorator Receptacle	20A	2 Pole - 3 Wires	2000V		High-Impact Polycarbonate	AC 125V
NGA-WL-DEC125-15-CA-TR	USB Charger Receptacle	15A	2 Pole - 3 Wires	1500V		High-Impact Polycarbonate	AC 125V
NGA-WL-DEC125-15-GFCI-TRWR	GFCI Receptacle - Self Test	15A	2 Pole - 3 Wires	2000V		High-Impact Polycarbonate	AC 125V



Retrofit Project ROI Calculator

Grizzly’s free project ROI tool for contractors and electricians!

Show your customers real numbers and facts so they know when their new lights will pay for themselves!

Sometimes it’s hard to convey **how much money new LED lighting can save them**, now you can show them exactly how much!

Simple enter the lighting facts (with **Grizzly models or any brand**) and print a report. You can also **hide your costs and markups** to only show the totals.



LED Retrofit ROI Calculator

Hide Control

Add Rebate

Reset

Print

General Parameters

Electricity Rate (c/kWh)

12

c/kWh

Operation Hours

18

day

Baseline

Description/Catalog

Old Lights Metal Halide

Quantity

45

Watts Per Luminaire

450

Cost Per Luminaire

0

LIGHTING CONTROL

Control Quantity

0

Control Reduction (%)

0

Control Cost

0

REBATES/INCIDENTAL COSTS

Baseline Results

Proposed

Light Family/Model

Artix Linear Adjustable High Bay - 165W

Wattage

165 W

Product



Quantity

45

Watts Per Luminaire

165

Labour Cost (Total)

125

Cost Per Luminaire

150

Hide Costs On Printed Report (Totals still includes both Costs)

LIGHTING CONTROL

Page 28

647-492-4256 | info@grizzlylighting.ca | GrizzlyLighting.ca

Retrofit & New Pole Quote Configurator

Easily request a quote
for poles directly from
the jobsite!

Use the configurator to request a
quote, **directly from the jobsite**. Take
photos and measurments, and
quickly submit a request.

A **real time reference drawing** for
the base plate and pole will show
you what you're requesting, and you
can **add mutiple pole types for one
request**.

Once confirmed, we will provide
stamped, engineered drawings,
fully up to Canadian code and **CSA
standards**.

New pole

Buying a new pole. Height, shape and base plate use standard specs.

Existing pole / site

Replacing on a site with a foundation. Match the measured bolt pattern or order a new base plate.

1 Pole

Shape

Round Straight

Length (ft)

28

Quantity

1

Diameter (in) — max 6"

4

Base dia (in)

4"

= shaft

2 Base plate & anchor bolts

Standard base plate for a 4" pole: $\square$ 8.5" plate, 7" BCD, 3/4" dia anchor bolts.

These are preview values ($\pm 1/2"$); final specs will include engineered drawings.

3 What mounts on top


Mounting / fixture

Bullhorn — 4 arms @ 90° (X)


Adapter: BH4-90 — 4U bullhorn, 4 arms @ 90° (cross), 2-3/8" tenons (C17-BH4-02)

Pole elevation

SVG



Overhead view — top-down layout of the arms; the elevation below shows the same mount from the side.

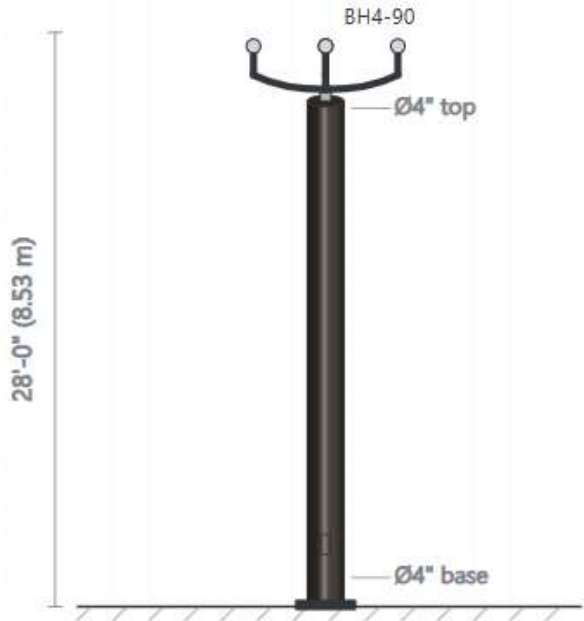

Suggested concrete base: $\approx$ 5'-0" deep $\times$ 24" dia
(estimate: 10% of height + 2 ft — confirm w/ engineer for soil, wind, frost)



GRIZZLY

LIGHTING



Fast Free Shipping!



Easy Returns!



Our **No-Hassle**
Warranty **Covers Your**
Labour!



Free Online Trade
Portal and ROI Tool!