Dome High Bay

150W & 240W Models





Description

A water and dust proof high bay in 150W and 240W sizes. Its 90° frosted dome lens reduces glare and spreads light evenly.

Features

- Field selectable wattage
- Selectable CCT (150W model)
- IP65 water and dust resistant
- 0-10V Dimmable
- DLC Premium listed
- Frosted dome lens, 6KV surge protected

Specifications	150W Model | 240W Model
Watts (Selectable)	80/100/150W | 150/200/240W
Voltage	120-347 VAC
Kelvin	3500/4000/5000K | 5000K
Efficacy	154 LPW | 152 LPW
Lumens (Max)	23,127 | 36,579
CRI	83 | 80
Operating Temp	-40°C to 45°C
Beam Angle	90°
Mounting	Hook / Suspended
Controls	0-10V Dimmable
Approx Lifespan	L70 50,000 hrs
Surge Protection	6KV


IP65 RATED

DLC LISTED PREMIUM


Technical Specifications and Certifications Provided by the Manufacturer

GRIZZLY LIGHTING

150W Model
HB-RD150-24

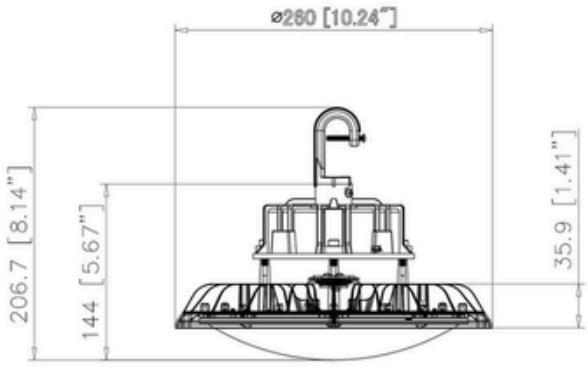

240W Model
HB-RD240-29

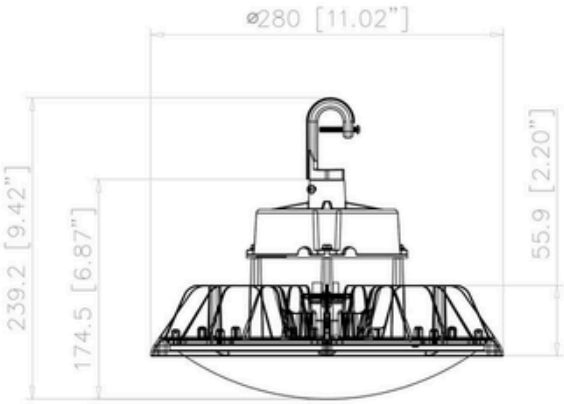

Dimensions in mm [inches]

Ordering Information

Model	150W Model	240W Model
Part Number	HB-RD150-24	HB-RD240-29
Wattage (Selectable)	80 / 100 / 150W	150 / 200 / 240W
Lumens	12,334 / 15,418 / 23,127	36,579 (at 240W)
Kelvin	3500K / 4000K / 5000K	5000K
Efficacy	154 LPW	152 LPW
CRI	83	80
Power Factor	0.93	0.97
THD	10.6%	5.9%
Diameter	10.24" (260 mm)	11.02" (280 mm)
Height with Hook	8.14" (206.7 mm)	9.42" (239.2 mm)
Weight	2.0 kg (4.4 lb)	2.74 kg (6.0 lb)

Both models: 120-347 VAC, 50/60Hz • IP65 • IK08 • cUL • DLC Premium • Flicker-free • Die-cast aluminium, black • Frosted polycarbonate lens