

Grizzly Dock Light

Wall Mounted Work Light



Description

Save time and money with this bright, efficient dock light. Increase your safety standards by providing a properly lit environment to work in. With no more dangerous container destuffing, the work can get done faster!

Features

- IP65 water and dust resistance
- Rugged cast aluminum housing in safety yellow
- Efficient 140 LPW output
- Impact resistant stainless steel cage
- ETL and cETL approved
- Polycarbonate high transmittance lens

Specifications	20w	30w	40w	50w
Watts	20w	30w	40w	50w
Voltage	100-277 VAC			
Kelvin	3000/4000/5000/5700/6500			
Efficacy	140 LPW			
Lumens	2800 ±10%	4200 ±10%	5600 ±10%	7000 ±10%
CRI	70+			
Operating Temp	-35°C to 60°C			
Beam Angle	30°			
Mounting	Wall mounting bracket			
Controls	On/Off Switch			
Lifespan	50,000 hrs			
Surge Protection	4 KV			



Technical Specifications and Certifications Provided by the Manufacturer



Single Arm




Double Arm





With Receptacles




Standard US Plug Available

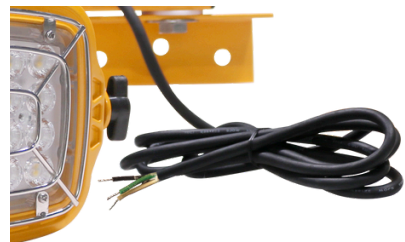


5ft Cord length

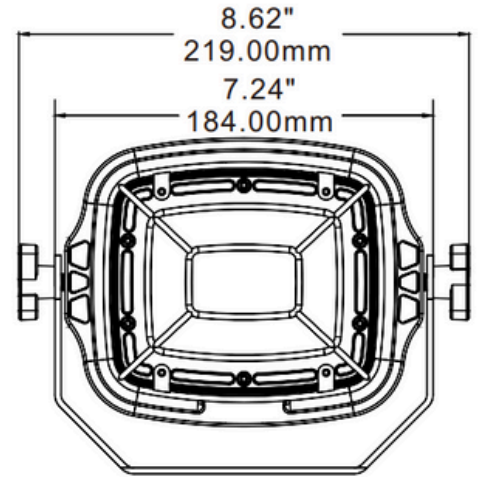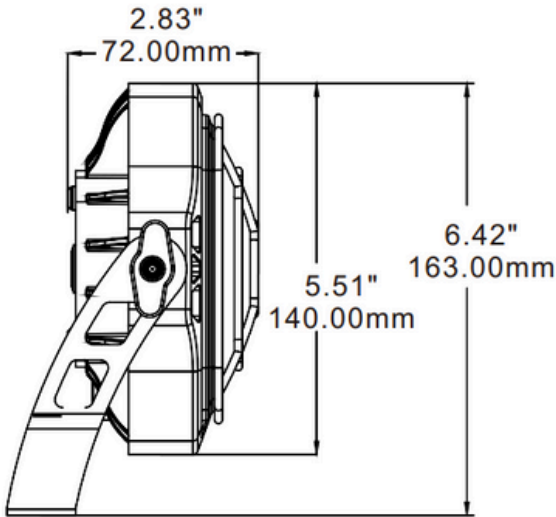


Single Arm

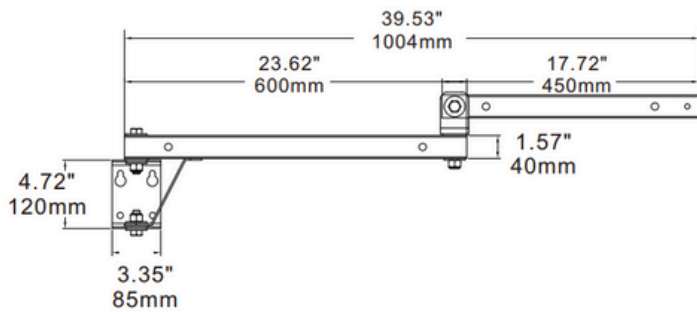


40" Bracket A1

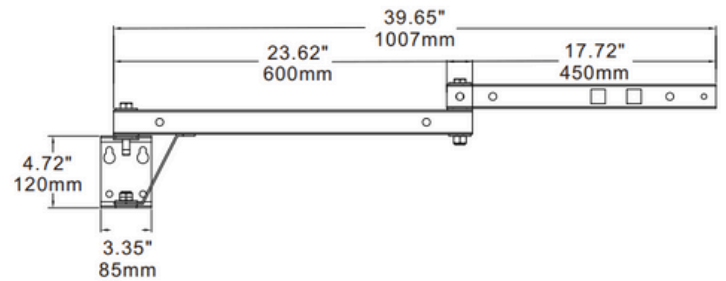

40" Bracket A2, Built-in receptacle

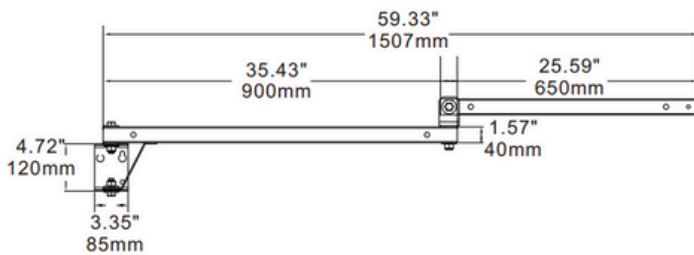


60" Bracket A3

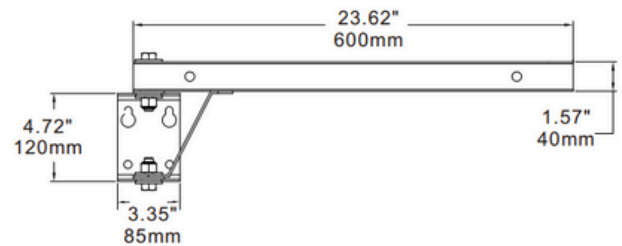


24" Bracket A4


Double Arm

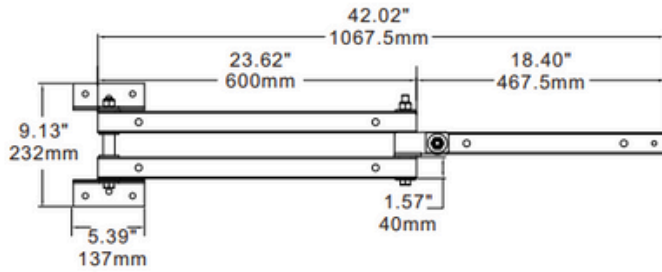


40" Bracket B1

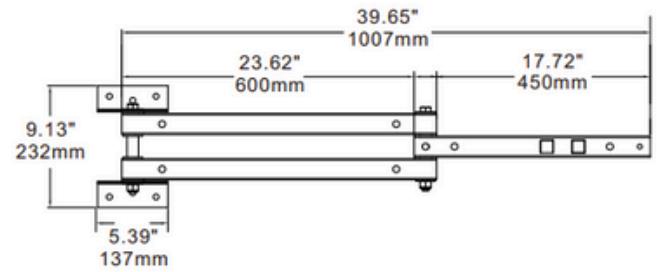


40" Bracket B2, Built-in receptacle

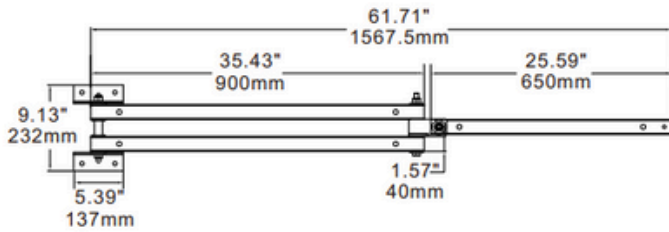


60" Bracket B3

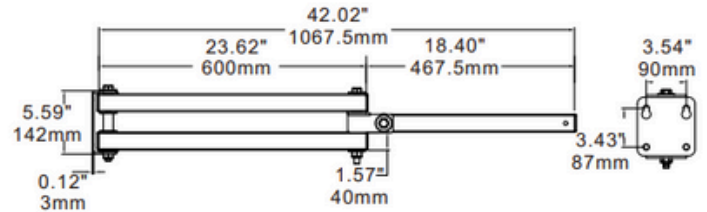

40" Bracket C1

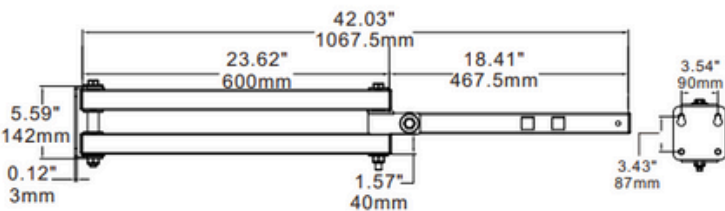

40" Bracket C2, Built-in receptacle

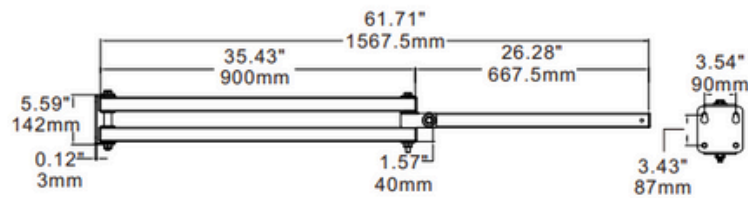

60" Bracket C3