



Selectable Corn Bulb

18 - 120 Watt Selectable
100-277 vac Corn Bulb

Specifications	18w	27w	36w	45w	54w	63w	80w	100w	120w
Watts	18w	27w	36w	45w	54w	63w	80w	100w	120w
Voltage	100-277 VAC								
Kelvin	3000/4000/5000k								
Efficacy	140 LPW								
Lumens	2520	3780	5040	6300	7560	8820	11200	14000	16800
CRI	80+								
Operating Temp	-30°C to 45°C								
Beam Distribution	360°								
Mounting	E26, E27, Ex39, E39, E40						E39, E40		
Approx Lifespan	50,000 hrs								
Surge Protection	4 KV								



Technical Specifications and Certifications Provided by the Manufacturer

Description

Reduce your inventory, cost, and time. Thrill your toughest customers with this innovative and super simple and easy color and wattage selectable corn bulb. Easily applied to many applications and DLC listed.


Features

- CCT and Wattage selectable
- 140 LPW high efficiency LEDs
- IP64 rated
- 4 KV surge protection
- DLC listed/LM79/LM80
- Overheating protection

Dimensions


WATT \ BASE	E26	E27	Ex39	E39	E40
18 W	Ø 2.36*5.97	Ø 2.36*6.09	Ø 2.36*6.76	Ø 2.36*6.76	Ø 3.34*6.92
27 W	Ø 2.36*6.56	Ø 2.36*6.68	Ø 2.36*7.35	Ø 2.36*7.35	Ø 2.36*7.51

DxL (Unit: inch | inch x25.4=mm)

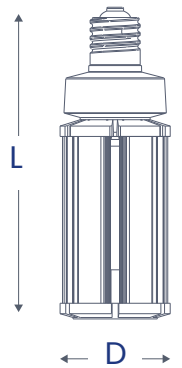

WATT \ BASE	E26	E27	Ex39	E39	E40
36 W	Ø 3.34*8.06	Ø 3.34*8.17	Ø 3.34*8.69	Ø 3.34*8.69	Ø 3.34*8.92
45 W	Ø 3.34*9.24	Ø 3.34*9.35	Ø 3.34*9.86	Ø 3.34*9.86	Ø 3.34*10.10
54 W	Ø 3.34*9.24	Ø 3.34*9.35	Ø 3.34*9.86	Ø 3.34*9.86	Ø 3.34*10.10
63 W	Ø 3.34*9.83	Ø 3.34*9.94	Ø 3.34*10.45	Ø 3.34*10.45	Ø 3.34*10.69
80 W	-	-	Ø 5.11*9.71	Ø 5.11*9.71	Ø 5.11*9.83
100 W	-	-	Ø 5.11*10.30	Ø 5.11*10.30	Ø 5.11*10.41
120 W	-	-	Ø 5.11*11.12	Ø 5.11*11.12	Ø 5.11*11.20

DxL (Unit: inch | inch x25.4=mm)

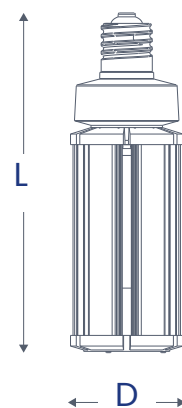

Remove ballast and reconnect wires directly to lamp holder (as seen in fig. 2)

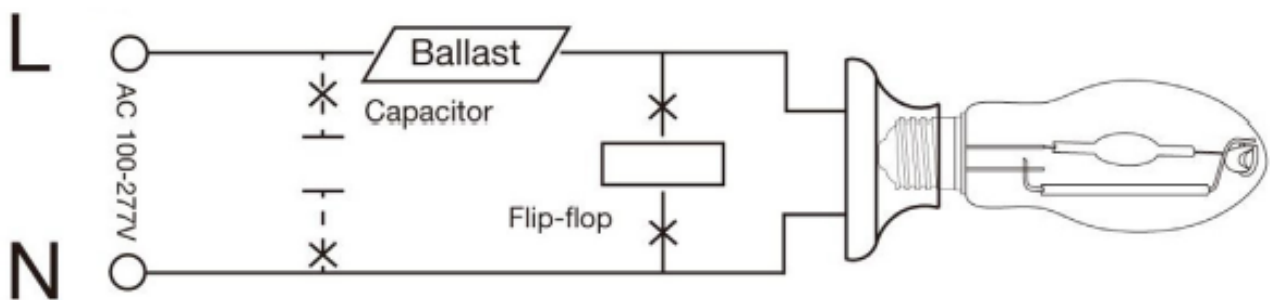


Fig. 1

Install new LED replacement lamp and ensure proper grounding

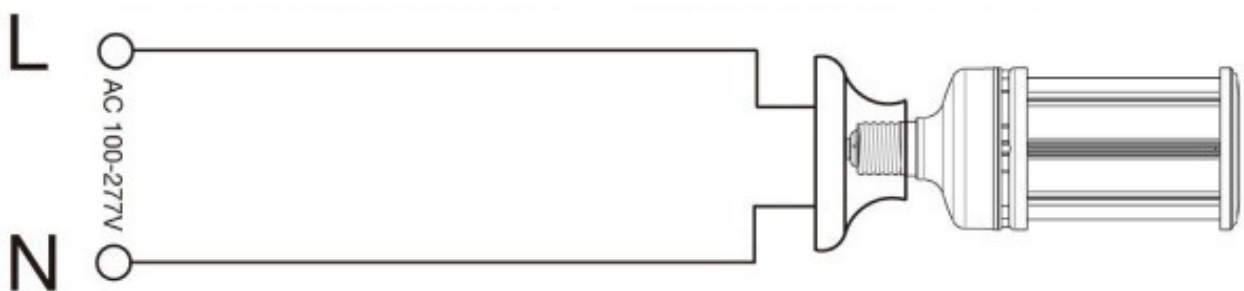


Fig. 2