

Selectable Corn Bulb

36 – 100 Watt
CCT Selectable
277–480 vac
Corn Bulb



Specifications	36w	45w	54w	80w	100w
Watts	36w	45w	54w	80w	100w
Voltage	277 – 480 VAC				
Kelvin	3000/4000/5000k				
Efficacy	140 LPW				
Lumens	5040	6300	7560	11200	14000
CRI	80+				
Operating Temp	-30°C to 45°C				
Beam Distribution	360°				
Mounting	E26, E27, Ex39, E39, E40			Ex39, E39, E40	
Approx Lifespan	50,000 hrs				
Surge Protection	4 KV				



Technical Specifications and Certifications Provided by the Manufacturer

Description


Reduce your inventory, cost, and time. Thrill your toughest customers with this innovative and super simple and easy color and wattage selectable corn bulb. Easily applied to many applications and DLC listed.

Features

- CCT selectable
- 140 LPW high efficiency LEDs
- IP64 rated
- 4 KV surge protection
- DLC listed/LM79/LM80
- Overheating protection

Dimensions

WATT \ BASE	E26	E27	Ex39	E39	E40
36 W	Ø 3.34*7.94	Ø 3.34*8.06	Ø 3.34*8.61	Ø 3.34*8.61	Ø 3.34*8.76
45 W	Ø 3.34*9.12	Ø 3.34*9.24	Ø 3.34*9.79	Ø 3.34*9.79	Ø 3.34*9.94
54 W	Ø 3.34*9.12	Ø 3.34*9.24	Ø 3.34*9.79	Ø 3.34*9.79	Ø 3.34*9.94
80 W	-	-	Ø 5.11*9.71	Ø 5.11*9.71	Ø 5.11*9.83
100 W	-	-	Ø 5.11*10.30	Ø 5.11*10.30	Ø 5.11*10.41

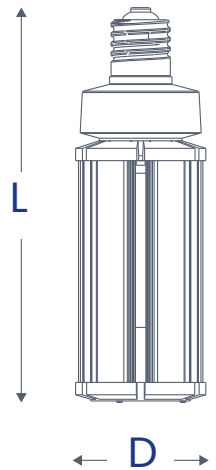

DxL (Unit: inch | inch x25.4=mm)



Remove ballast and reconnect wires directly to lamp holder (as seen in fig. 2)

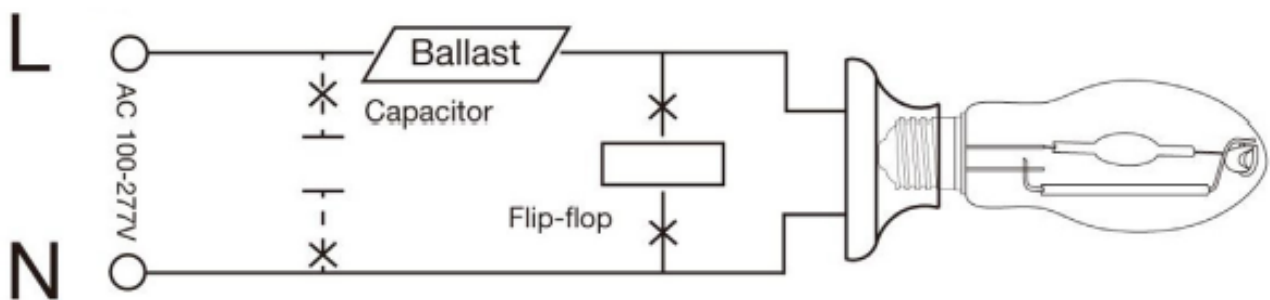


Fig. 1

Install new LED replacement lamp and ensure proper grounding

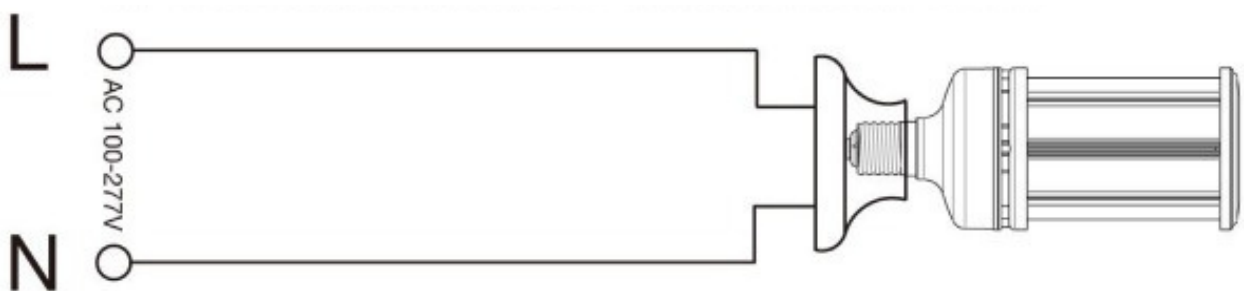


Fig. 2